3 AA BATTERIES

XPP-5420B, XPP-5420G

INTRINSICALLY SAFE PERMISSIBLE FLASHLIGHT

NIGHTSTICK®

Life Depends on Light™



XPP-5420G



Large, textured button

IP-67 DUST/WATER PROOF

CLASS I DIV 1



Durable polymer body is **impact & chemical resistant**



AVAILABLE IN MULTIPLE COLORS

XPP-5420B



Sharp focused flashlight beam

CERTIFIED

160 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com


© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

CLASS I DIV 1

PRODUCT SPECIFICATION SHEET

INTRINSICALLY SAFE PERMISSIBLE FLASHLIGHT

3 AA BATTERIES (not included)

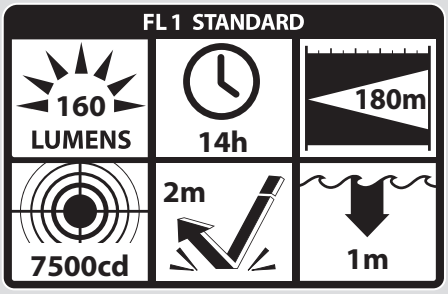

ITEM NUMBER/UPC
- XPP-5420B, UPC 0 17398 80092 1
- XPP-5420G, UPC 0 17398 80091 4

MARKET APPLICATIONS
- Hazardous work environments, industrial

CERTIFICATIONS
- ETLus, CE, UKCA, MSHA

CASE MATERIAL
- Engineered polymer

FLASHLIGHT LUMENS/RUNTIME
- 160L, 14 hrs. runtime

CANDELA
- 7,500

BEAM DISTANCE
- 180 m

WATER RATING
- ANSI IP-67 dustproof / waterproof

DROP RATING
- 2 meters

DIMENSIONS
- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.3 oz (207 g)

POWER SOURCE
- AA batteries (not included)

WARRANTY
- Limited lifetime

WHAT'S INCLUDED
- Flashlight
- Removable lanyard
- Instruction manual

Bayco Products, Inc. XPP-5420B
640 S. Sanden Blvd.
Wylie, TX 75098

Permissible Nightstick 5420 Flashlight

MSHA APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS:
1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

Intertek
ID 4003544
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV 1 GRPS E-G T135C
CLASS I ZONE 0 IIC T3
CLASS II ZONE 20 IIIC T135C
-20ºC ≤ Tamb ≤ +40ºC
1.5V/Cell AA Alkaline

Bayco Products, Inc. XPP-5420G
640 S. Sanden Blvd.
Wylie, TX 75098

Permissible Nightstick 5420 Flashlight

MSHA APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS:
1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

Intertek
ID 4003544
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV 1 GRPS E-G T135C
CLASS I ZONE 0 IIC T3
CLASS II ZONE 20 IIIC T135C
-20ºC ≤ Tamb ≤ +40ºC
1.5V/Cell AA Alkaline

CERTIFIED

© 2021 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates. XPP-5420 Series-21